

CROC® ForkCoatings

Perfectly matched to the application




Polyurethane red
Surface without tread
5 / 10 mm thick



Polyurethane blue
Surface without tread
5 mm thick / FDA-certified*
(food application)



Polyurethane red
Profiled surface
7 mm thick

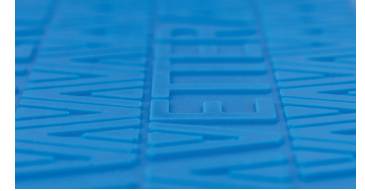

Polyurethane
Profiled surface / 7 mm thick
FDA-certified* (food application)



GrippFix black
8 mm thick



GrippFix white
6 mm thick
(food application)



Spray coating
for all-around coatings and
complex surface geometries
from 3 mm thickness

Coating material	Slip resistance in dry condition			Slip resistance in wet condition			Resistance					Noise reduction		
	Cage box	Wooden pallet	Plastic pallet	Cage box	Wooden pallet	Plastic pallet	Point load**	Area load***	Acids / Alkalis	Gasoline / oil	High-pressure cleaner	Cage box	Steel plates	Steel boxes
"Blank" fork without coating	--	--	--	--	--	--	++	++	++	++	++	--	--	--
Polyurethane Surface without tread 5 mm thick	++	++	++	○	○	-	++	++	○	+	+	○	+	○
Polyurethane Surface without tread 10mm thick	++	++	++	○	○	-	+	++	○	+	+	○	+	○
Polyurethane with profiled surface / 7 mm thick	○	○	○	○	○	-	+	+	○	+	+	○	+	○
GrippFix	+	+	+	++	++	++	-	++	+	○	+	+	+	+
Spray coating	○	○	○	-	-	-	++	++	○	+	++	-	-	-

Definition

++ Very good + Good ○ Satisfying - Sufficient -- Unsuitable

* FDA certification: Certificate for the use in the food industry (US-Food and Drug Administration)

** Point load: Steel boxes, shelves, cage boxes, flat steel

*** Area load: Pallets, Containers with entry pockets, Sheets